

**Bracket Installation**

**CAUTION:** Do not install the bracket if the surface temperature of the windshield glass is less than 60°F.

**NOTE:** Prior to installing the bracket, ensure that the windshield glass surface temperature ranges between 70° and 100°F.

- 1) Using the template provided, determine the camera mounting surface area on the windshield.
- 2) Using a clean rag and a 50/50 mixture of isopropyl alcohol and water, clean the camera mounting surface area on the windshield.
- 3) Use a clean dry wipe to dry the camera mounting surface area on the windshield.
- 4) Allow approximately 5 minutes for the camera mounting surface area on the windshield to dry completely.
- 5) Using the bracket template, locate the exact mounting area of the bracket on the windshield glass.
- 6) Remove the plastic liner from the bracket to expose the adhesive.
- 7) Position the adhesive side of the bracket, in the mounting location, on the glass. Press on the bracket using approximately 15 psi of force for a minimum of 30 seconds.
- 8) Allow a minimum of 30 minutes for the bracket adhesive to set before mounting the OnLane™ module to the bracket.

**Camera Installation**


See OnLane™ Maintenance Manual MM-1291 for detailed installation instructions.

**For Reference Only**

Camera Height = 260 cm above ground  
 Camera Offset = 27 cm from center of windshield  
 Vehicle Width = 247 cm

**Harness Connector Pin Assignment**

Row A		Row B	
Pin #	Signal Name	Pin #	Signal Name
A1	Left Speaker +Out	B1	Left Speaker -Out
A2	Right Speaker +Out	B2	Right Speaker -Out
A3	Unused	B3	Unused
A4	Unused	B4	Unused
A5	Unused	B5	Unused
A6	Unused	B6	Unused
A7	Lane Searching Indicator Out	B7	Enabled Indicator Out
A8	Unused	B8	Enable/Disable Switch In
A9	Ignition In	B9	Ground
A10	Unused	B10	Unused
A11	Unused	B11	Unused
A12	J1939_Hi	B12	J1939_Lo

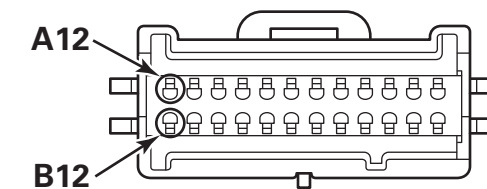

**MERITOR WABCO**

**OnLane™ Installation Template**

International Prostar  
 One-Piece Windshield