

**Bracket Installation**

**CAUTION:** Do not install the bracket if the surface temperature of the windshield glass is less than 60°F.

**NOTE:** Prior to installing the bracket, ensure that the windshield glass surface temperature ranges between 70° and 100°F.

- 1) Using the template provided, determine the camera mounting surface area on the windshield.
- 2) Using a clean rag and a 50/50 mixture of isopropyl alcohol and water, clean the camera mounting surface area on the windshield.
- 3) Use a clean dry wipe to dry the camera mounting surface area on the windshield.
- 4) Allow approximately 5 minutes for the camera mounting surface area on the windshield to dry completely.
- 5) Using the bracket template, locate the exact mounting area of the bracket on the windshield glass.
- 6) Remove the plastic liner from the bracket to expose the adhesive.
- 7) Position the adhesive side of the bracket, in the mounting location, on the glass. Press on the bracket using approximately 15 psi of force for a minimum of 30 seconds.
- 8) Allow a minimum of 30 minutes for the bracket adhesive to set before mounting the OnLane™ module to the bracket.

**Camera Installation**


See OnLane™ Maintenance Manual MM-1291 for detailed installation instructions.

**For Reference Only**

Camera Height = 260 cm above ground  
 Camera Offset = 32 cm from center of windshield  
 Vehicle Width = 260 cm

**Harness Connector Pin Assignment**

Row A		Row B	
Pin #	Signal Name	Pin #	Signal Name
A1	Left Speaker +Out	B1	Left Speaker -Out
A2	Right Speaker +Out	B2	Right Speaker -Out
A3	Unused	B3	Unused
A4	Left Turn Signal In	B4	Right Turn Signal In
A5	Unused	B5	Unused
A6	Unused	B6	Unused
A7	Lane Searching Indicator Out	B7	Enabled Indicator Out
A8	Unused	B8	Enable/Disable Switch In
A9	Ignition In	B9	Ground
A10	Unused	B10	Unused
A11	Unused	B11	Unused
A12	J1939_Hi	B12	J1939_Lo

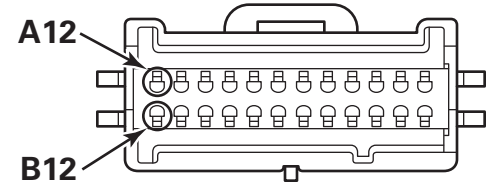

**MERITOR WABCO**

**OnLane™ Installation Template**

Kenworth T660/T800  
 One-Piece Windshield